

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 414 497 A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 90309158.5

(51) Int. Cl.⁵: **D04B 21/00**

(22) Date of filing: 21.08.90

(30) Priority: 22.08.89 US 397178
30.05.90 US 530352

(43) Date of publication of application:
27.02.91 Bulletin 91/09

(84) Designated Contracting States:
AT BE CH DE ES FR GB GR IT LI


(71) Applicant: **E.I. DU PONT DE NEMOURS AND COMPANY**
1007 Market Street
Wilmington Delaware 19898(US)

(72) Inventor: **Gajjar, Bahrat Jaybhadra**
3238 Champions Drive
Wilmington, Delaware 19808(US)

(74) Representative: **Jones, Alan John et al**
CARPMAELS & RANSFORD 43 Bloomsbury
Square
London, WC1A 2RA(GB)

(54) **Method of warp knitting.**

(57) Warp knit fabric having a two and three-course repeat pattern of alternating first and second, or first, second and third and first, second, third and fourth bar yarns. The fabric is prepared by interlocking the first and second or first, second and third bar yarns using a combination of knit and laid-in stitches in the same for two course, and same and opposite fashion for three and four course repeat.

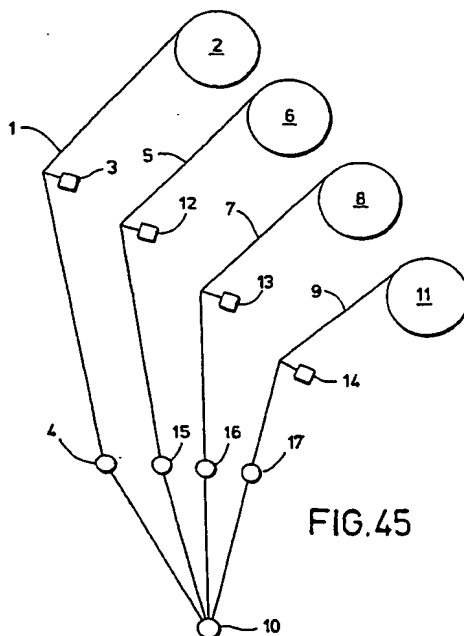**FIG.45**

METHOD OF WARP KNITTING

Background of the Invention

This invention relates to warp knitted fabrics and, more particularly, to a method of knitting the fabrics wherein in two course repeat, first and second bar yarns will appear on the loop side or technical face of the fabric, and in three course repeat, all three, first, second and third, bar yarns will appear on the loop side. In the case of four course repeat, four yarns will appear on the loop side. However, in all three cases only the front bar yarn will appear on the float or technical back of the fabric.

Spun yarn can be knitted on the warp knitting machine, but it is difficult to knit it at high speeds, and even at lower knitting speeds the knit performance of the spun yarn is very poor (1000-2000 racks/end out for the filament yarn out vs. 100 racks/end out for spun yarn). When spun yarn is knitting, it could break but when it is laid-in, it does not involve knitting and thus it does not break. Also, when the spun yarn is replaced with filament yarn, the knitting improves as the filament yarn knits much better. In conventional knitting in a six course repeat the spun yarn is knitting all 6 stitches (one stitch per course). In U.S. Patent No. 4,802,346 in the same 6 stitches only three stitches are knitting with spun yarn and in the instant invention only two stitches are knitted with spun yarn.

Summary of the Invention

This invention provides a method of preparing fabric of yarn with improved knitting performance while improving the uniformity of the fabric as yarns from two bars are blending on the fabric surface. The method involves operating the front or first guide bar of a warp knitting machine in repeating patterns of alternating laid-in and knit for two course repeat while operating the second or back guide bar in repeating stitch pattern that is in the same direction to the stitch pattern of the first guide bar. So when the first guide bar threads are laid in, the second guide bar threads are knit-in and subsequently repeating both stitch patterns to interlock along the fabric.

For three course repeat the method involves operating the front or first guide bar of a warp knitting machine in repeating patterns of laid-in stitches twice and knit-in stitches once. The middle bar uses laid-in, knit-in and laid-in stitches at the same time. The back or third bar repeat knit-in stitches once and laid-in stitches twice. In other words, when one bar is knitting in, other bars are laying in and in a three bar fabric in knitting three courses a guide bar knits only once. All three bars could go in the same direction or they could go in opposite directions.

The method may also include the additional step of operating a third bar for two course repeat, and for three course repeat it could use the fourth bar in conjunction with the first and second or first and third guide bar in knit-in or laid-in stitch patterns. The yarn used with this method may be untextured continuous filament yarn, textured yarn, spun yarn, or these in combination with elastomeric yarns.

The two course repeat fabrics when knitted with 100% hard smooth yarn like 40-13 nylon runs or splits but three bar three course fabric or four bar four course repeat fabrics have better stability or run resistance.

Brief Description of the Drawings

Figs. 1-44 are stitch pattern diagrams for the fabrics made according to the invention.

Fig. 45 is a schematic elevation view of the apparatus elements for warp knitting according to the invention.

Figs. 46 and 47 are photographs, enlarged 25 X, of the face (loop) and back (float) sides respectively of a fabric knit according to the invention (fabric F, Table II).

Detailed Description of the Illustrated Embodiments

The invention is best defined in terms of stitch patterns as shown in Figs. 1 to 44 for warp knit fabrics with two, three and four sets of threads. One could use non-elastomeric yarns in these stitch constructions and/or by adding one extra bar with elastomeric yarn in the back. This last bar could use any one of the same type of stitches or 1-2, 1-0 or 1-0, 1-2 with open (2-1, 0-1) or closed (1-2, 1-0) or mix (2-1, 1-0) or

three needle float (2-3, 1-0) or combination of knit and lay (e.g. 1-2, 0-0) or laid-in stitches (e.g. 1-1, 0-0, 2-2, 0-0), etc.

For each of the figures represented a single needle-bar is employed, which is fed from a front or first bar and one or more second, third or back guide bars. Knitting needle positions for each of a plurality of successive courses are represented in the diagrams by horizontal lines or dots, the top line representing the course formed immediately after the course represented by the bottom line. One first or front-bar end and two or more other bar ends are shown in each instance, it being understood that one end of each is knitted on each knitting needle for every course. More particularly, referring to Fig. 1 the stitch construction of the fabric is notationally set out and shows that the threads of the first or front bar, one of which is indicated at 60, have back-and-forth movement to nonadjacent needles in successive courses as indicated by the numbers 2-3, 0-0 and that the threads of the second 61 have similar movements as indicated by the numbers 3-3, 1-0, respectively.

The fabric is preferably made according to the invention on a tricot or similar warp knitting machine employing a single needle bar and at least three guide bars respectively known as the back, middle and front guide bars. The needle bar is provided with knitting needles which may vary in number according to the gauge of the machine, and each guide bar has a number of yarn guides corresponding to the number of needles of the needle bar. The guide bars are able to be shogged under pattern control a distance of one or more needles in opposite directions lengthwise of the needle bar, and both bars are also swingable transversely of the needle bar to permit their yarn guides to pass between the needles, the combined shogging and swinging movements permitting the yarns to be fed to the needles and to be knit thereby.

The schematic illustration for such a warp knitting machine is shown in Fig. 45. The front or first guide bar warp is fed from threads 1 on beam 2. The threads first pass in the usual well-known manner through a fixed reed 3 which serves to keep the threads separated from the reed. Each thread 1 is threaded through its guide in guide bar 4 and onto needle bed 10. The threads 5 from beam 6 and threads 7 from beam 8 and threads 9 from beam 11 are fed through respective fixed reeds 12, 13 and 14 and second, third and fourth guide bars 15, 16 and 17 to needle bed 10. It should be understood that the beams could be split as disclosed in U.S. Patent No. 4,020,656 and/or fully or partially threaded. The movements of needle through successive courses are indicated below each diagram by their numbers as set forth in Table I.

Fig. 1 represents a two course interlocking structure with both the guide bars going in the same direction.

Fig. 2 represents a three course interlocking structure with three guide bars going in the same direction.

Figs. 3 to 44 are the examples of the new structures that could be produced on warp knit equipment for example.

Figs. 3 to 15 represent two bar, two course interlocking structures going in the same direction.

Figs. 16 to 19 represent two bar, four and eight course interlocking structures going in the same direction, but incorporating Atlas Stitches and chain or pillar stitches.

Figs. 20 to 22 and 27 to 34 represent three bar, three and four course interlocking structures with guide bars going in the same and opposite directions.

Figs. 23 and 24 to 26 represent four bar, four course interlocking structures with guide bars going in the same and opposite directions.

Figs. 35 to 40 represent two bar, four course interlocking structures with guide bars going in the same and opposite directions.

Figs. 41, 42 and 44 represent two bar, six course interlocking structures with guide bars going in the same and opposite direction.

Fig. 43 represents two bar, eight course interlocking structures with guide bars going in the opposite direction.

From the above it should be understood that a warp knitter skilled in the art can knit the two, three, four, five, six, seven and eight bar and course fabrics with knit-in and laid-in stitches including close (e.g. 2-3, 1-0), open (e.g. 3-2, 0-1), mix (e.g. 2-3, 0-1) stitches and two needles (e.g. 1-0, 1-2), three needle (2-3, 1-0), four needle (3-4, 1-0) or five needle (1-0, 5-4) floats. Also, one could use chain or pillar stitches (e.g. 1-0, 0-1 or 0-1, 1-0). Also one could use a variety of laid-in stitches, e.g. 0 (e.g. 0-0), 1 (e.g. 0-0, 1-1), 2 (e.g. 0-0, 2-2), 3 (e.g. 0-0, 3-3), 4 (e.g. 0-0, 4-4) and 5 (e.g. 0-0, 5-5) needle floats. In addition, one could incorporate Jersey (e.g. 2-3, 1-0// 1-0, 1-2), stabilized (e.g. 1-0, 0-1//2-3, 1-0), Delaware (e.g. 2-3, 1-0//1-0, 0-1), Atlas (e.g. 0-1, 1-2, 3-2, 2-1), or knit weft insertion stitch or knit-lay Brandywine stitch techniques (U.S. Patent No. 4,688,403).

In another embodiment using three guide bars on a warp-knitting machine, a first guide is operated in a repeating stitch pattern of knit-in stitches and a second guide bar is operated in a repeating stitch pattern of alternating laid-in and knit-in stitches while the third guide bar is operated in a repeating stitch pattern

opposite that in the same direction as the second guide threads stitch pattern wherein when the second guide threads are laid-in the third guide threads are knit-in and the pattern is repeated. The first guide bar threads are non-elastomeric such as nylon and the second and third guide bar threads are elastomeric such as spandex. Three fabric constructions exemplifying this embodiment are set forth in Table III.

TABLE I

Fig. No.	Front or 1st Bar	Middle or 2nd Bar	Back or 3rd Bar
1	2-3, 0-0	3-3, 1-0	--
2	2-3, 0-0, 0-0	0-0, 2-3, 0-0	0-0, 0-0, 2-3
3	1-0, 3-3	3-3, 1-0	--
4	2-3, 0-0	3-3, 1-0	--
5	3-4, 0-0	4-4, 1-0	--
6	3-2, 0-0	3-3, 1-0	--
7	1-2, 0-0	2-2, 1-0	--
8	2-3, 0-0	4-4, 1-0	--
9	2-3, 0-0	1-1, 1-0	--
10	2-3, 0-0	5-5, 1-0	--
11	1-3, 0-0	3-3, 2-0	--
12	4-2, 0-0	4-4, 0-3	--
13	2-3, 0-0	3-3, 0-2	--
14	2-3, 0-0	3-3, 0-1	--
15	0-1, 5-5	0-0, 5-4	--
16	1-0, 3-3, 2-1, 3-3	0-0, 2-3, 1-1, 2-3	--
17	0-1, 3-3, 5-4, 2-2	0-0, 2-3, 5-5, 3-2	--
18	0-1, 1-1, 2-3, 4-4	0-0, 1-2, 2-2, 3-4	--
19	5-4, 4-4, 3-2, 1-1	5-5, 4-3, 3-3, 2-1	--
	0-1, 2-2, 2-3, 4-4	1-1, 1-0, 0-0, 0-1	--
	5-4, 3-3, 3-2, 1-1		
20	1-0, 3-3, 0-0	0-0, 2-3, 0-0	0-0, 3-3, 1-0
21	1-1, 0-0, 2-3	2-3, 0-0, 1-1	0-0, 1-2, 0-0
22	1-0, 3-3, 1-0	3-3, 1-0, 3-3	1-1, 1-0, 0-0
23	0-0, 1-1, 0-0, 2-3,	2-3, 0-0, 1-1, 0-0	0-0, 0-1, 1-0, 0-0

TABLE I (CONTINUED)

Fig. No.	Front or 1st Bar	2nd Bar	3rd Bar	Back or 4th Bar
24	1-0, 3-3, 0-0, 3-3	0-0, 3-3, 0-0, 2-3	0-0, 2-3, 0-0, 3-3	0-0, 3-3, 1-0, 3-3
25	1-0, 2-3, 0-0, 1-1	3-3, 0-0, 2-3, 1-0	1-0, 3-3, 1-0, 3-3	3-3, 1-0, 3-3, 1-0
26	0-0, 1-1, 0-0, 1-2	1-2, 0-0, 1-1, 0-0	0-0, 1-2, 0-0, 1-1	1-1, 0-0, 1-2, 0-0
27	2-3, 0-0, 0-0	3-3, 3-3, 1-0	3-3, 1-0, 3-3	
28	1-0, 3-3, 3-3	3-3, 3-3, 1-0	3-3, 1-0, 3-3	
29	3-4, 0-0, 0-0	4-4, 4-4, 1-0	4-4, 1-0, 4-4	
30	1-2, 0-0, 0-0	2-2, 2-2, 1-0	2-2, 1-0, 2-2	
31	2-3, 0-0, 0-0	3-3, 3-3, 1-0	1-1, 1-0, 1-1	
32	0-2, 3-3, 3-3	3-3, 3-3, 0-2	3-3, 0-2, 3-3	
33	3-2, 0-0, 0-0	3-3, 3-3, 0-1	3-3, 0-1, 3-3	
34	2-3, 1-1, 0-0	3-3, 2-2, 1-0	3-3, 1-0, 2-2	

TABLE I (CONTINUED)

Fig. No.	Front or 1st Bar	Back or 2nd Bar
35	1-0, 2-3, 0-0, 2-3	0-0, 3-3, 1-0, 3-3
36	1-0, 2-3, 0-0, 2-3	3-3, 0-0, 2-3, 0-0
37	1-0, 2-3, 0-0, 3-3	0-0, 3-3, 1-0, 2-3
38	1-0, 2-3, 0-0, 3-3	3-3, 0-0, 2-3, 1-0
39	0-1, 2-1, 0-0, 2-1	0-0, 3-3, 0-1, 2-2
40	2-3, 1-0, 3-3, 0-0	0-0, 2-2, 0-1, 1-0
41	2-3, 1-0, 3-3, 0-0, 2-3, 1-0	0-0, 3-3, 1-0, 2-3, 0-0, 3-3
42	2-3, 1-0, 3-3, 1-0, 3-3, 1-0	0-0, 3-3, 1-0, 3-3, 1-0, 3-3
43	2-3, 1-0, 2-3, 1-0, 3-3, 0-0, 3-3, 0-0	0-0, 3-3, 0-0, 3-3, 1-0, 2-3, 1-0, 2-3
44	1-0, 1-0, 2-3, 0-0, 2-3, 0-0	1-1, 0-0, 3-3, 1-0, 3-3, 1-0

EXAMPLE

A tricot warp knitting machine was employed to produce the fabrics as identified in Table II as Fabric Nos. D3, E, 30A and F.

Fabrics D3, E and 30A are control fabrics. Fabric F of this invention is shown in Figs. 1, 46 and 47.

The test method for determining thickness, bulk, static extension, air permeability and power, and finishing procedures for the fabrics are detailed below.

TEST METHODS

Thickness is measured according to ASTM D1777-64 using apparatus commercially available from
 5 Customer Scientific Instruments, Inc., Whippany, NJ. Thickness is measured in inches.
 Bulk (specific volume) is calculated according to the formula:

$$\text{Bulk (cm}^3/\text{g)} = \frac{2.54 \times 8361 \times T}{28.35 H}$$

10

wherein

T = Thickness (inches)

W - Weight (g/cm²)

15

Hand Stretch is the percent length change of a fabric sample pulled by hand expressed as a percentage of original relaxed length.

20

Power is measured in general accordance with ASTM D 177581. A three (3) inch wide fabric sample is stretched at a constant rate on an Elongation Tensile Testing Machine under a load of three (3) and twelve (12) pounds. Power is the force in pounds per square inch of fabric area at fifty percent (50%) elongation on the unload cycle. In the same test percent work recovery and percent elongation were measured.

Static Extension Test determines fabric elongation and growth. Measurements are made using a Model C5138 static extension tester available from Customer Scientific Instrument Co., Kearny, NJ.

Test Stretch is the length of a fabric sample while under a load of 2 lb. per inch fabric width expressed as a percentage of original relaxed length.

25

Growth is measured by holding a fabric sample at 80% of the total stretch under four pound load for two hours, then measuring its relaxed length after one minute and again after one hour. Growth is expressed as percentages of original relaxed fabric length.

30

Air Permeability is the rate of air flow through the fabric under a differential pressure between the two fabric surfaces and expressed in cubic feet of air per minute per square foot of fabric. It is measured in accordance with ASTM Method D737-75.

FINISHING PROCEDURE

35

Step 1 - Steam the fabrics.

Step 2 - Heat set the fabrics on the Pin Tenter at 375° F. 4 boxes - 50 secs. 7% overfeed and 7% over with the greige fabric.

Step 3 - Beck scour and dye the fabrics.

40

Step 4 - Dry on the Pin Tenter at 290° F. 30 yds./min. and set the Pin Tenter at the fabric's wet width.

While the invention has been illustrated using elastomeric yarns, it should be understood that a stretchable textured yarn would provide similar surface effects. This technology is also useful for two needle bed warp knit machines, e.g. "simplex" machines.

45

50

55

TABLE II

FABRIC CONSTRUCTIONS

NYLON/LYCRA SPANDEX TRICOT - 28 GAUGE

F.B. AND/OR MIDDLE BAR 40-13 T860 BRIGHT NYLON//
B.B. 40 DENIER LYCRA

Fabric No.	Front Bar		Middle Bar		Back Bar		Quality Inches		Runners No. of F.B.//M.B.//B.B.*		Type Bars	Fabric
D3	1-0,	3-3	3-3,	1-0	1-0,	1-2	7-1/2	7-1/2	37.5//37.5//27		3	Control
E	1-0,	3-3	3-3,	1-0	0-0,	3-3	6-1/2	6-1/2	35//35//3		3	Control
30A#	2-3,	1-0	--		1-0,	1-2	7-1/2	7-1/2	58//24		2	Control
F	2-3,	0-0	3-3,	1-0	1-0,	1-2	6-1/2	6-1/2	37//37//26		2	Test

* All guide bars are fully threaded

Jersey Control

Fabric No.	Weight Oz./Yd. ²	Greige Fabrics				Boiled Off				
		Count VXC/In.	Hand		Thick. BSI	Bulk CC/G	Width Inch	Weight Oz./Yd. ²	Thick. BSI	Bulk CC/G
			Stretch %V	%C						
D3	8.8	86x114	160x200	.053"	4.50	28-1/4	10.8	.052	3.60	
E	5.1	72x112	20x220	.036"	5.34	22	6.1	.036	4.44	
30A	6.3	68x116	160x160	.038"	4.52	33	8.4	.038	3.39	
F	9.6	92x100	160x220	.056"	4.39	26	11.7	.053	3.38	

TABLE II (CONTINUED)

FINISHED FABRIC PROPERTIES

NYLON/LYCRA SPANDEX TRICOT - 28 GAUGE

P.B. AND/OR M.B. 40-13 T860 BRIGHT NYLON//B.B. 40 DENIER LYCRA

Fabric No.	Weight Oz./Yd. ²	Width	Count		Thick. BSI	Bulk CC/G	Hand Stretch	
			WPI	CPI			% Vale	% Course
D3	7.8	30	82	x 96	.047"	4.54	120	x 180
E	3.6	24	88	x 42	.017"	3.56	0	x 180
30A	5.4	35	64	x 116	.033"	4.41	130	x 130
F	7.9	31	78	x 42	.047"	4.46	120	x 180

Woven Static Ext. Test (3321-03)

Fabric No.	% Avail. Fab. Str.		% Test Eng.		% Growth 1 Min.		% Growth 1 Hr.	
	Vale	Course	Vale	Course	Vale	Course	Vale	Course
D3	193	239	154	191	23	17	17	8
E	16	308	13	246	4	3	3	21
30A	202	142	166	113	28	14	18	5
F	222	209	177	167	38	6	24	1

TABLE II (CONTINUED)

Fabric No.	Cu. Ft. Min./Ft. ²	Wet Sag % Rec.		Zwick		% Elongation	
		Vale	Course	3 lb. Vale	12 lb. Vale	Vale	Course
D3	163	61	34	0	0	193	210
E	253	52	46	0	0	0	303
30A	258	52	34	0	0	197	140
F	217	60	36	0	0	155	178
Fabric No.	Unload - 50% Vale	% Work Rec.					
		Vale	Course				
D3	.155	.091	50				
E	0	.008	43				
30A	.083	.105	61				
F	.171	.090	57				

TABLE III

FABRIC CONSTRUCTION FRONT BAR 40-13 NYLON AND MIDDLE AND BACK BARS 40 DENIER T146 LYCRA BY DU PONT							
	Stitch			Runners			
Fabric No.	F.B./M.B./B.B.	Quality	Gauge	F.B.	M.B.	B.B.	% Lycra
92A	2-3, 1-0/1-0, 2-2/0-0, 1-2	7-1/2"	28	60"	28"	28"	36.2
92B	2-3, 1-0/1-0, 2-2/2-2, 1-0	7-1/2"	28	60"	28"	20"	33.3
92D	3-4, 1-0/1-0, 2-2/0-0, 1-2	7-1/2"	28	89"	20"	20"	20.3

While single needle bar machines have been disclosed for knitting the fabrics of this invention, it should be understood that these fabrics can be knit with two needle bar machines. In addition, a fabric could be knit of 100% elastomeric yarn or with non-elastomeric in the front bar and elastomeric yarns in the middle and back bars which would provide middle and back bar interlocking.

Claims

1. A method of warp knitting a plurality of threads from at least two bars on a warp knitting machine operating in a multi-course repeating stitch pattern which comprises the steps of: operating first guide threads in a repeating stitch pattern of alternating laid-in and knit-in stitches, while operating second guide threads in a repeating stitch pattern that is in the same direction to said first guide threads stitch pattern wherein when said second guide threads are laid-in, said second guide threads are knit-in and subsequently repeating both stitch patterns.
2. The method of claim 1, there being three guide bars operating in a three course repeating stitch pattern, said guide bars being operated so that each of said guide bars knit only one course within a repeat.
3. The method of claim 1, there being four guide bars in a four course repeating stitch pattern, said guide bars being operated so that each of said guide bars knit only one course within a repeat.
4. A fabric knit in accordance with the method as defined in claim 1.
5. The fabric of claim 4 wherein said guide bars are supplied with elastomeric yarn.
6. A fabric knit in accordance with the method of claim 2.
7. A fabric knit according to claim 6 wherein the first guide bar yarn is non-elastomeric and the second and third guide bar yarn is elastomeric yarn.
8. A fabric knit in accordance with the method of claim 3.
9. A method of warp knitting a plurality of threads from three guide bars on a warp knitting machine operating in a multi-course repeating stitch pattern which comprises the steps of: operating first guide threads in a repeating stitch pattern of knit-in stitches, and operating the second guide threads in a repeating stitch pattern of alternating laid-in and knit-in stitches, while operating third guide threads in a repeating stitch pattern that is in the same direction to said second guide threads stitch pattern wherein when said first guide threads are laid-in, said third guide threads are knit-in and subsequently repeating both stitch patterns.
10. A fabric knit according to claim 9 wherein the first guide bar yarn is non-elastomeric and the second and third guide bar yarn is elastomeric yarn.

FIG.1

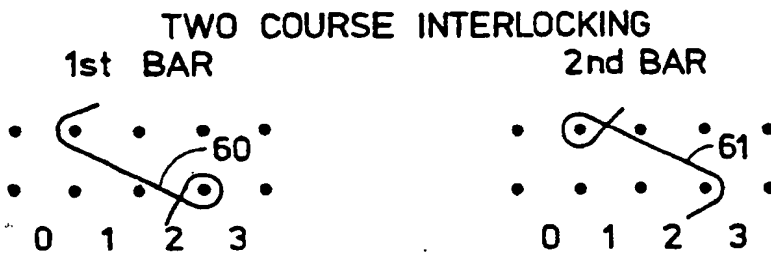
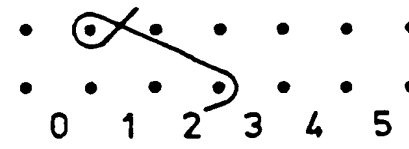
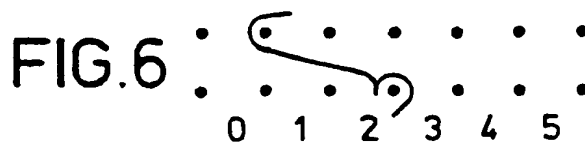
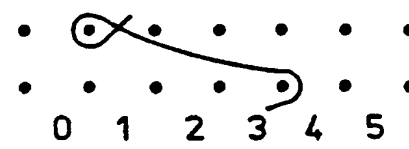
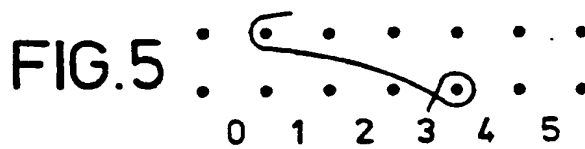
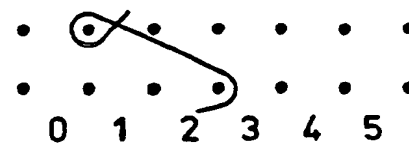
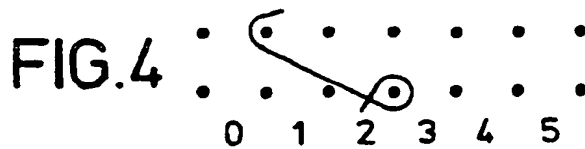
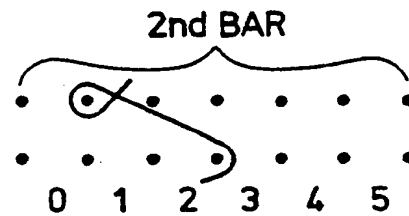
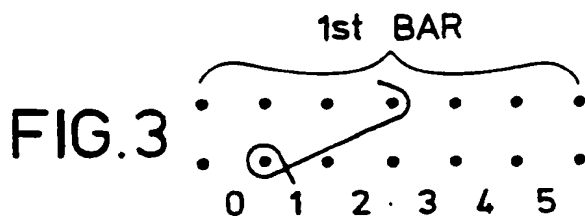
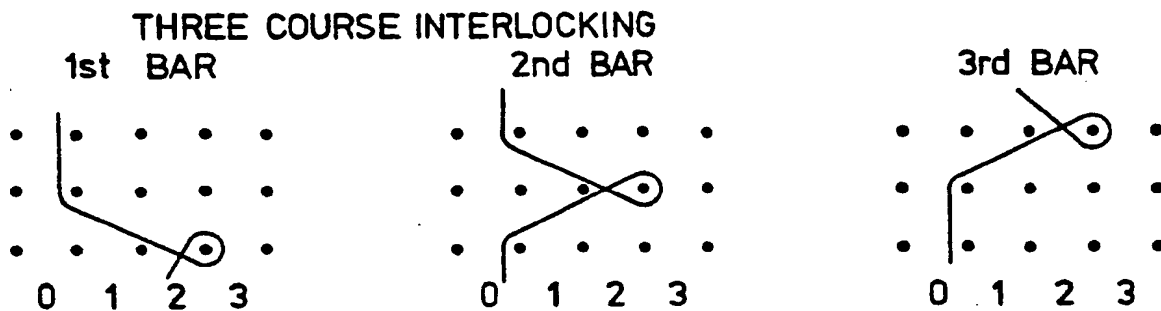
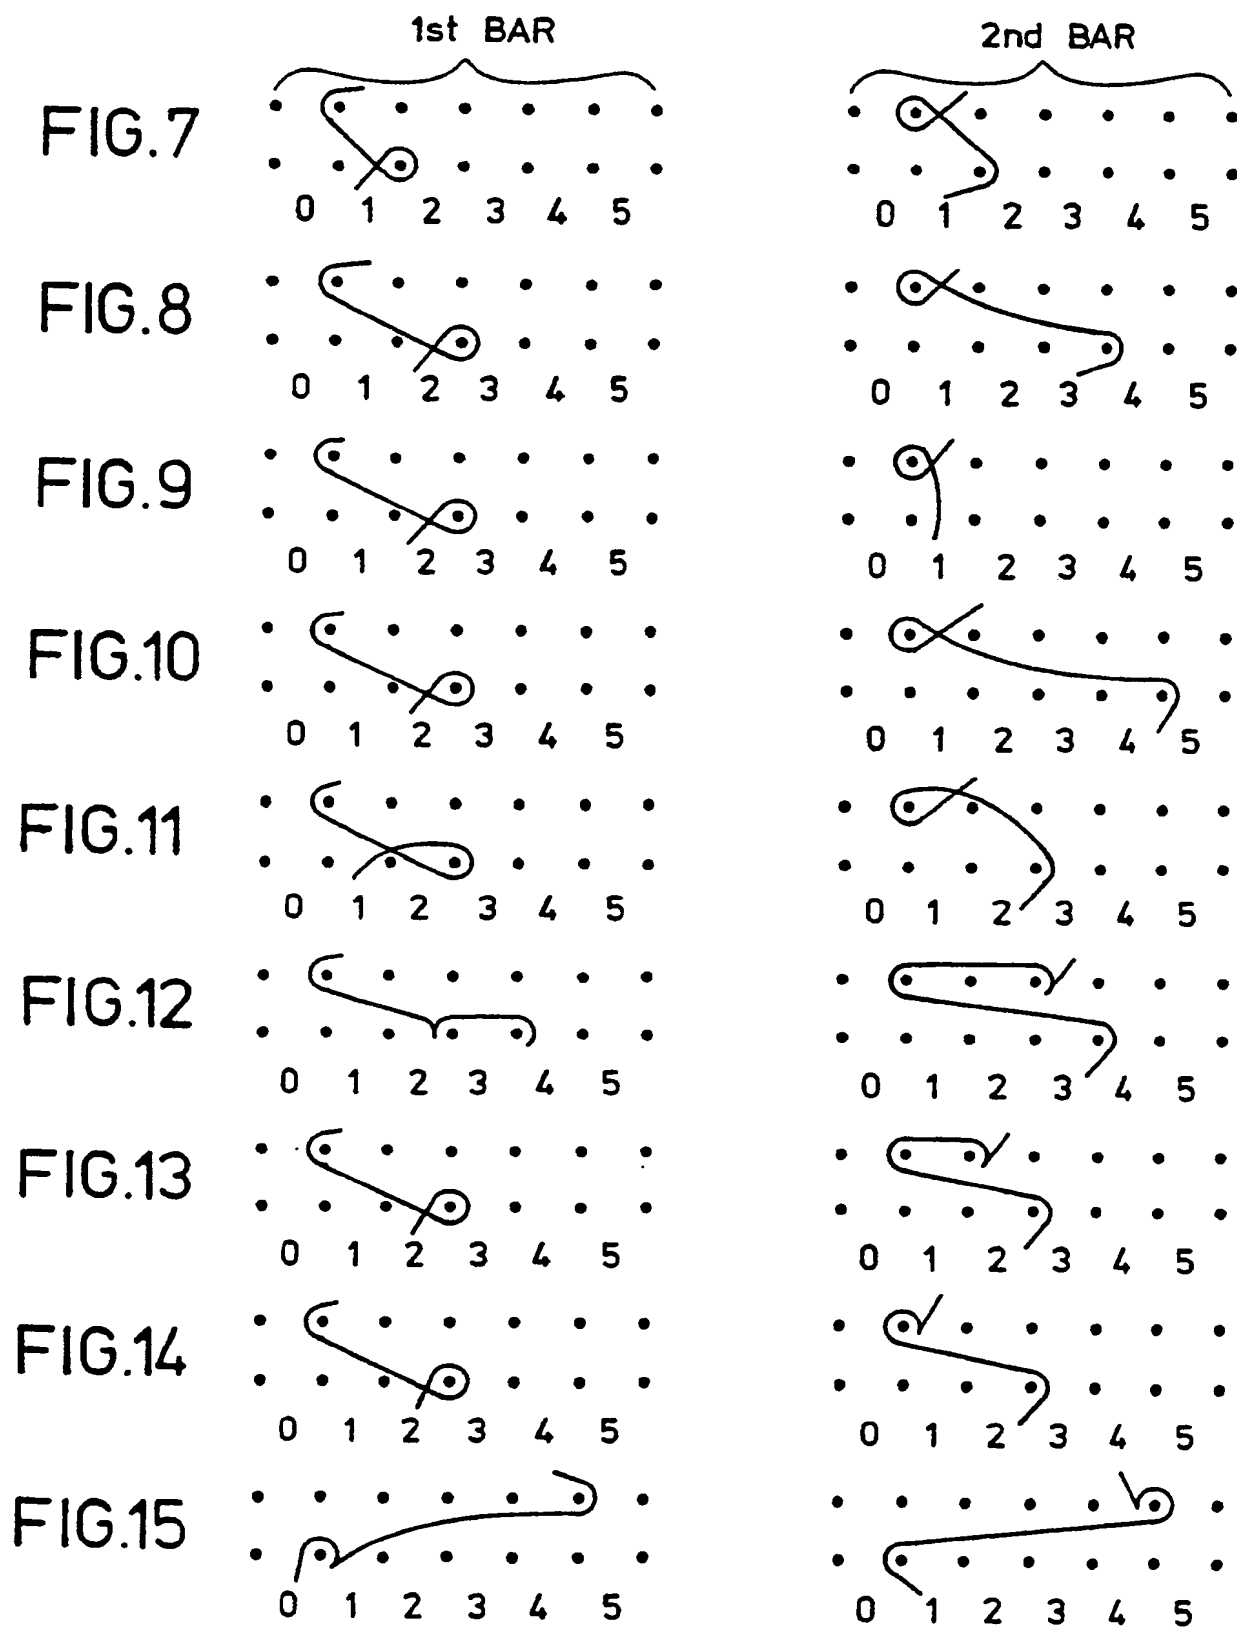
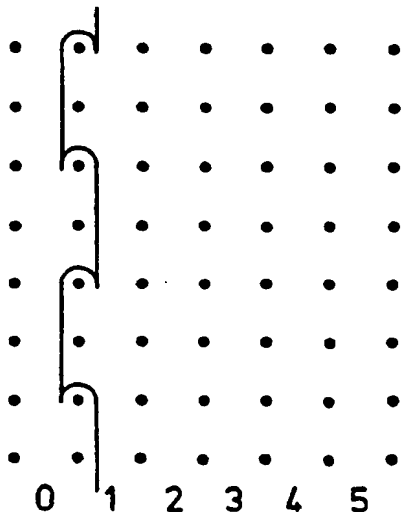
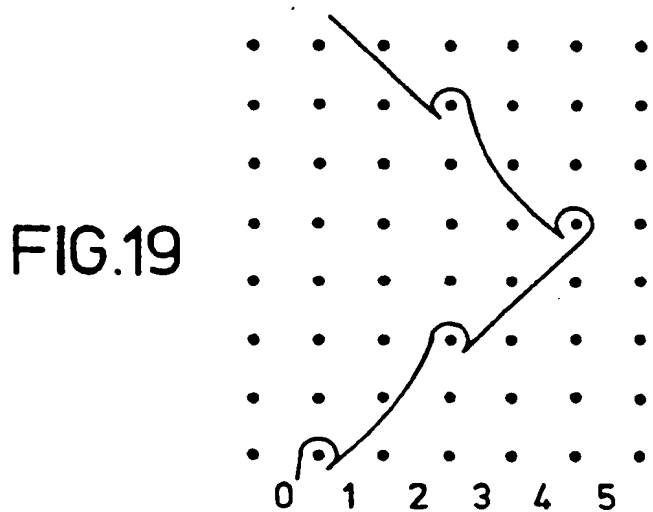
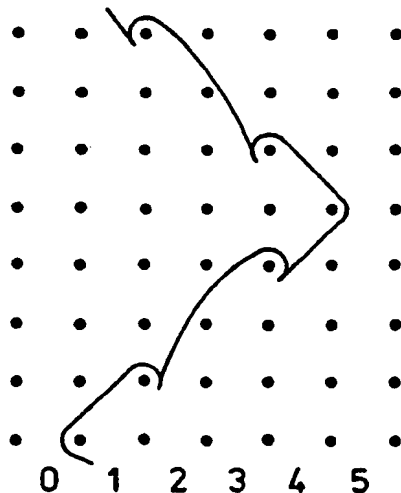
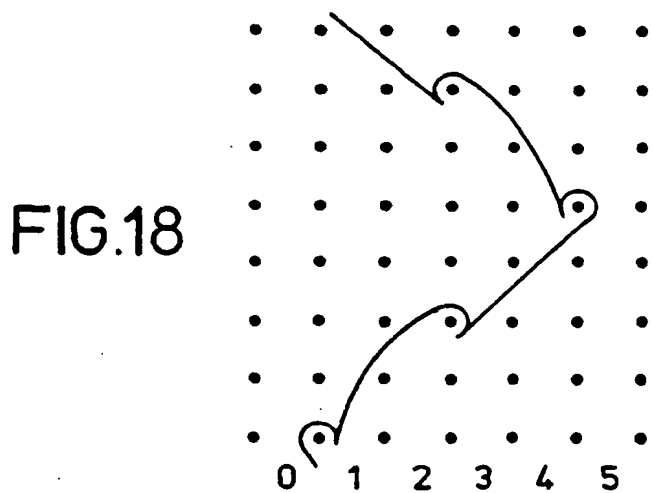
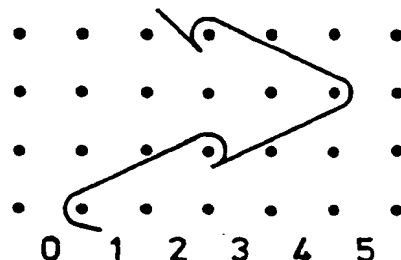
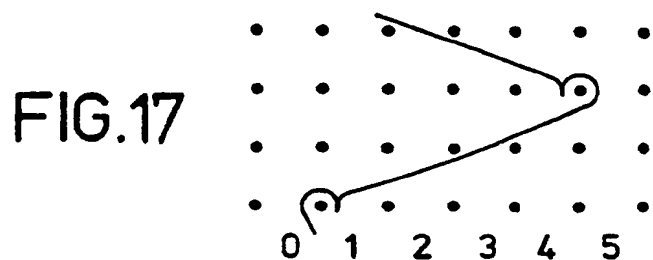
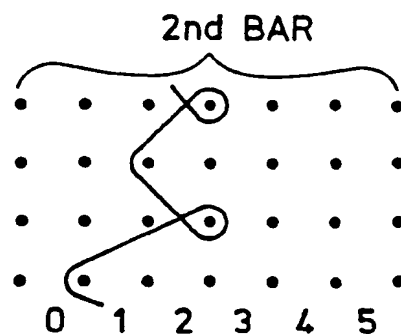
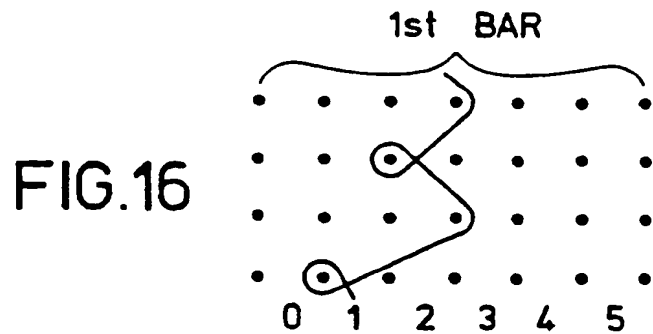
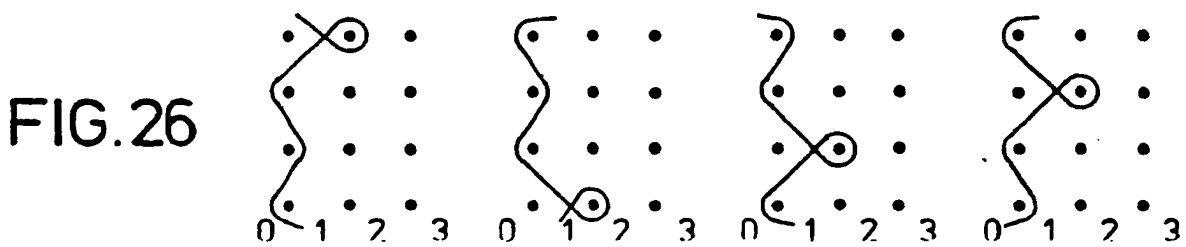
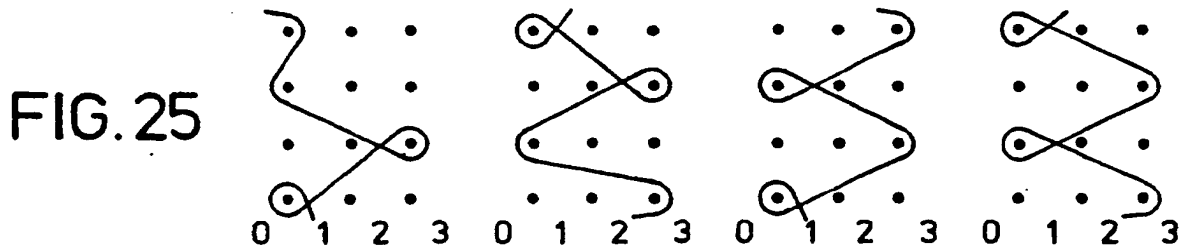
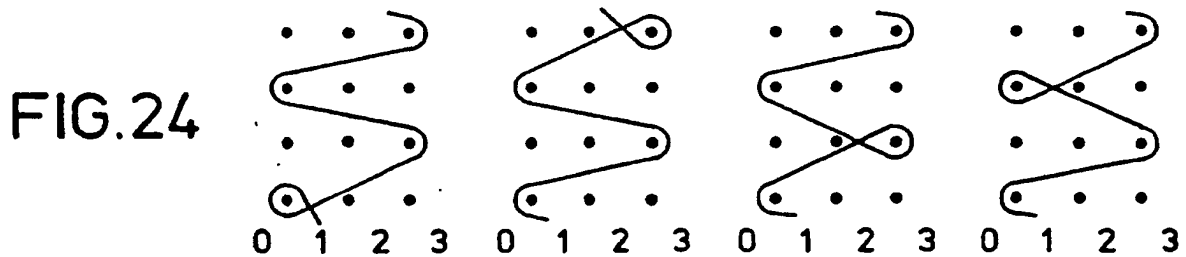
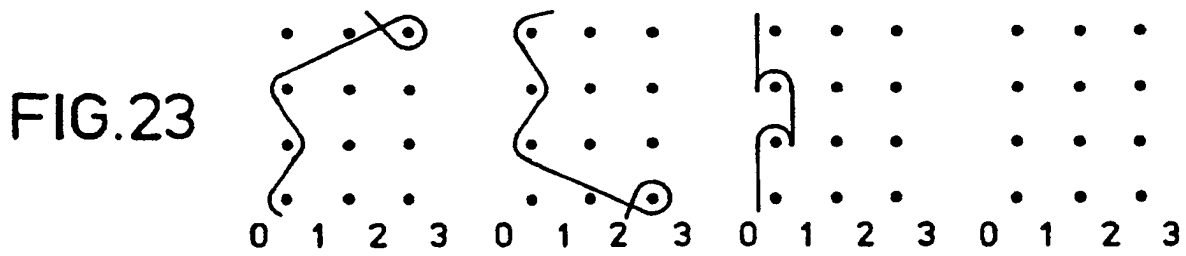
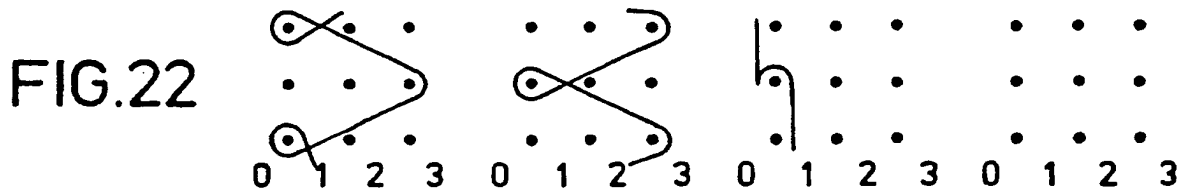
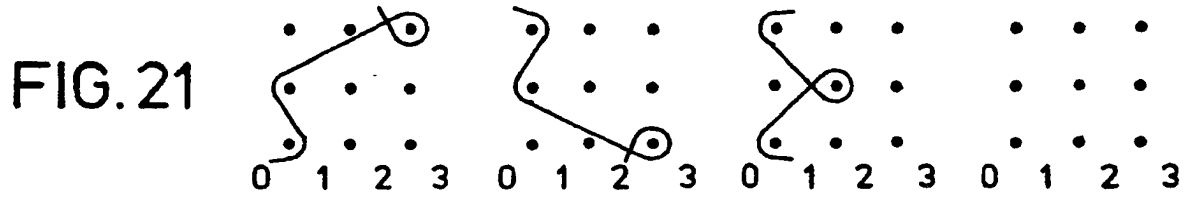
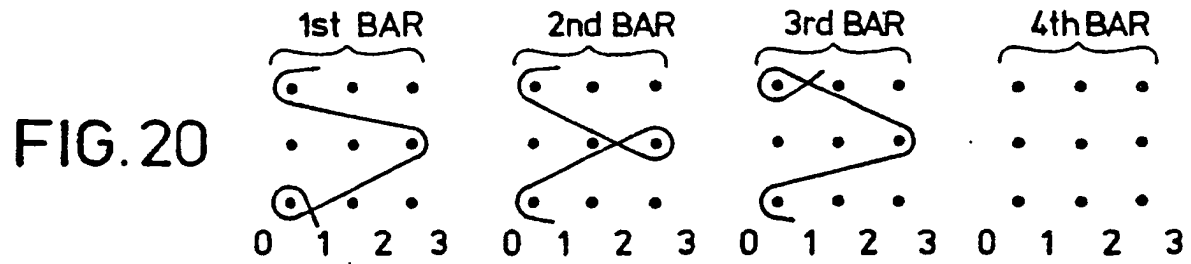


FIG.2









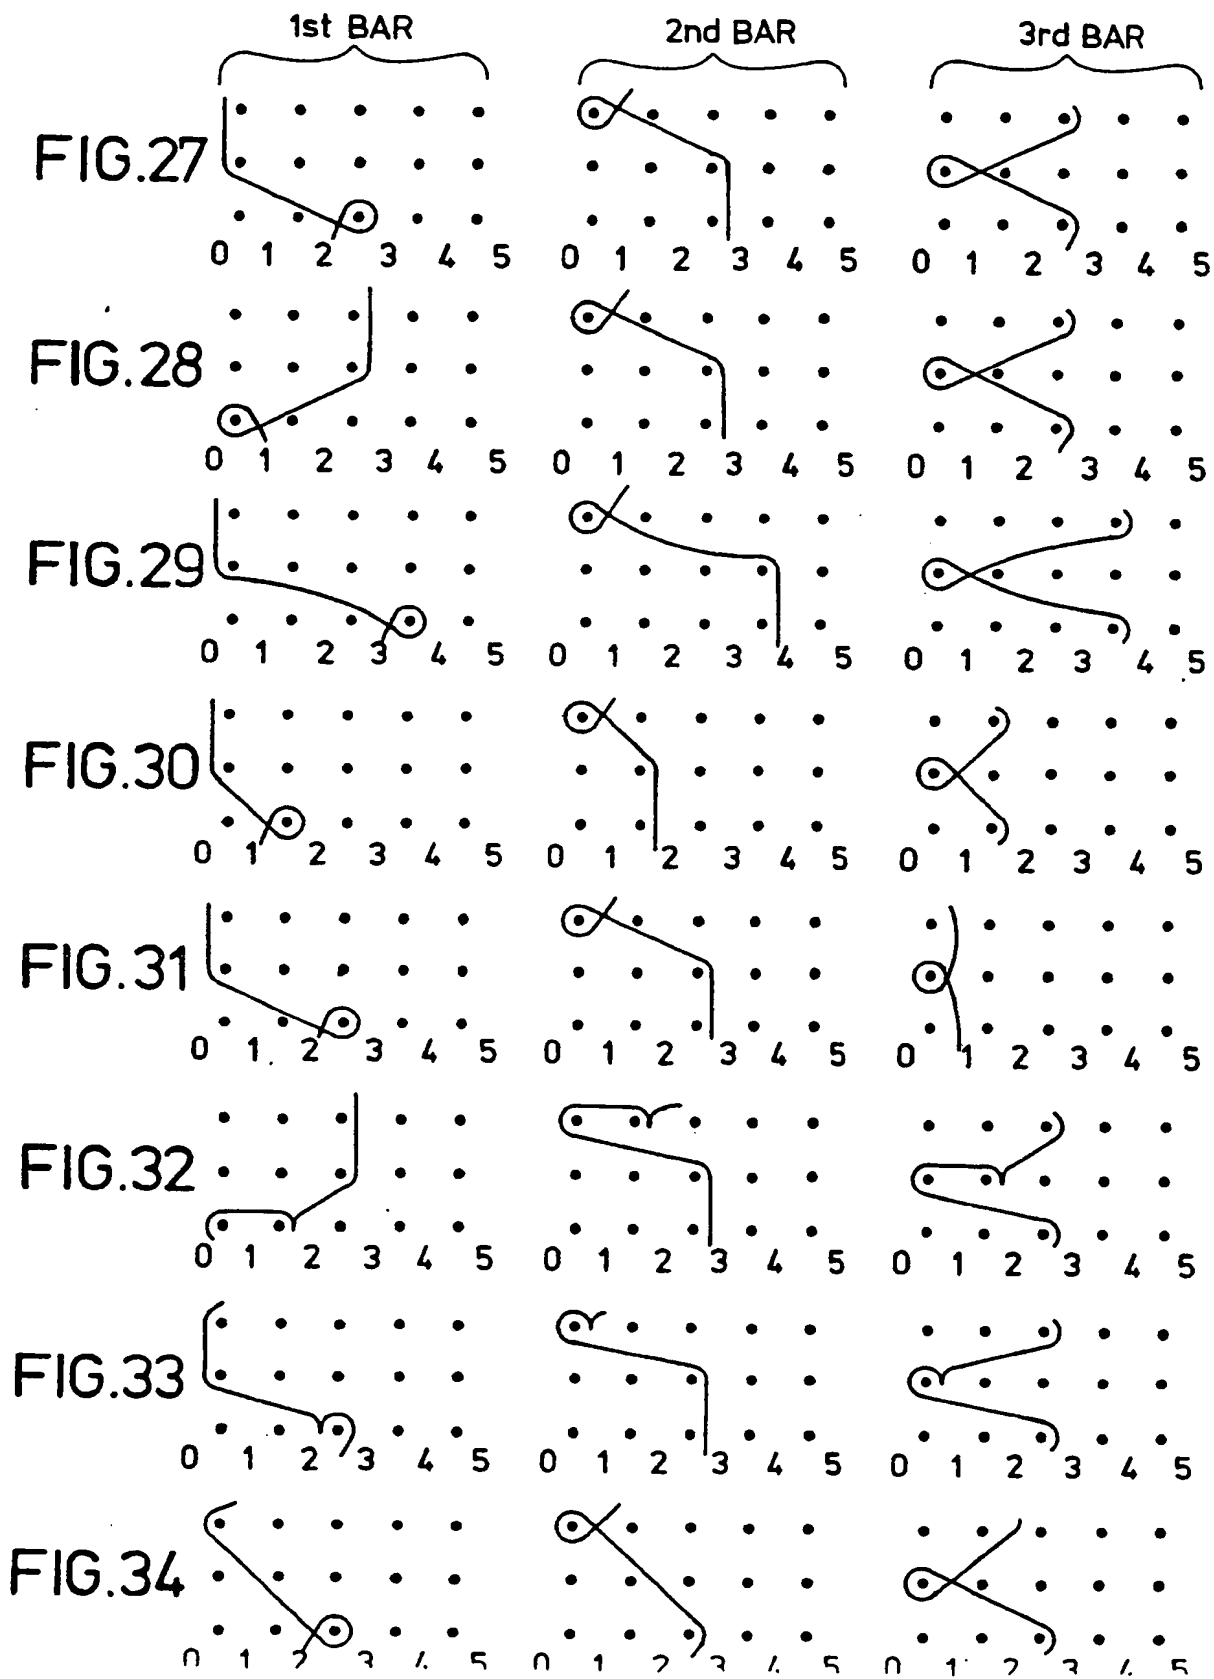


FIG. 35

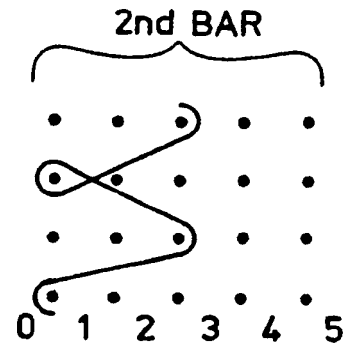
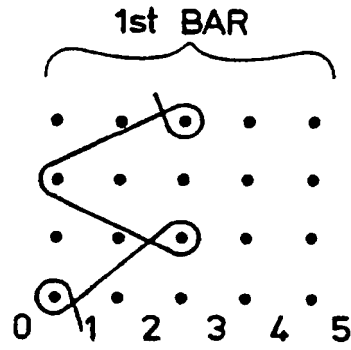


FIG. 36


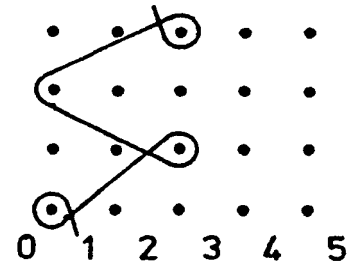


FIG. 37


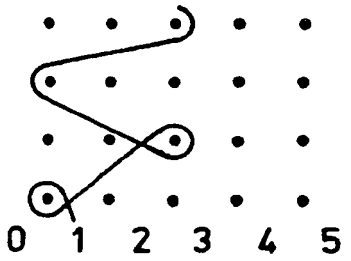


FIG. 38


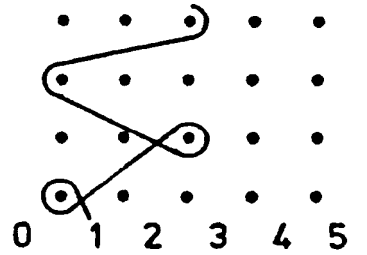


FIG. 39


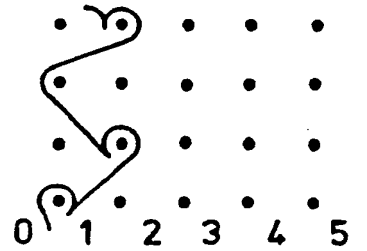


FIG. 40


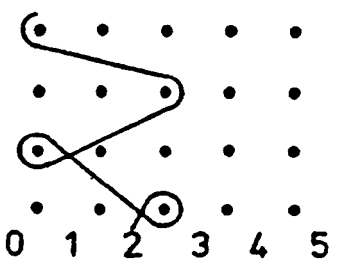


FIG.41

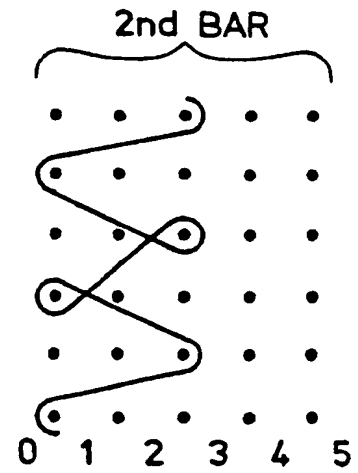
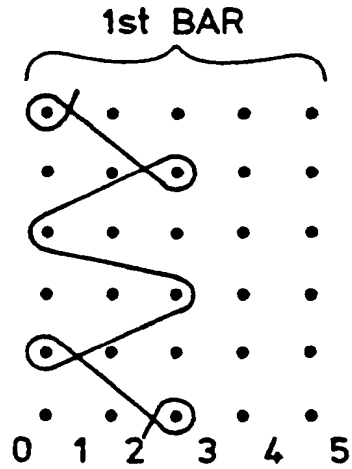


FIG.42

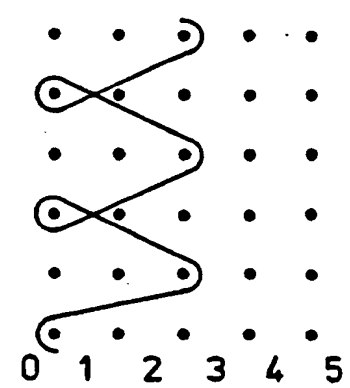
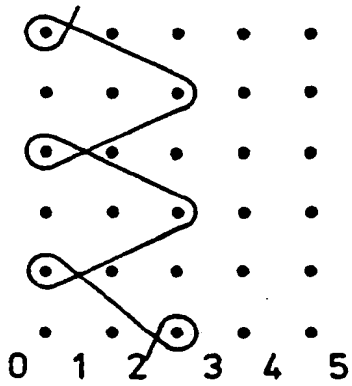


FIG.43

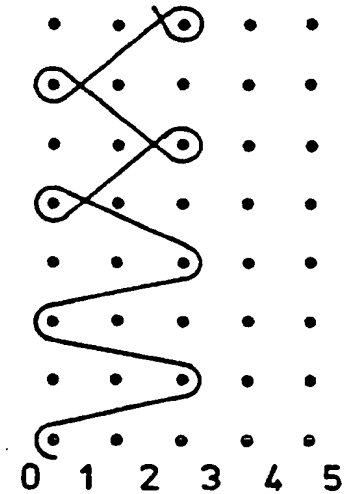
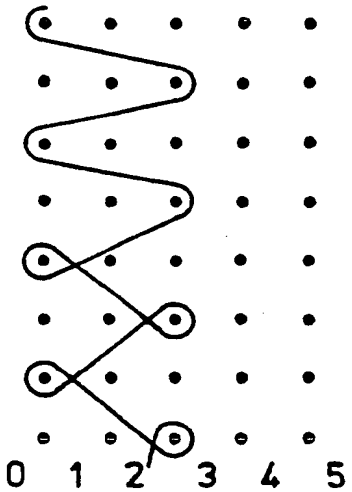
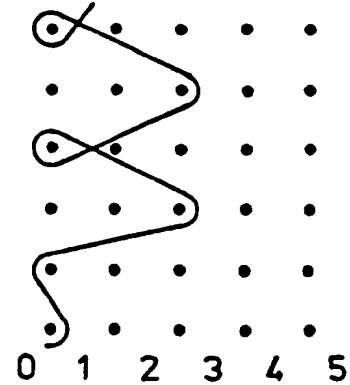
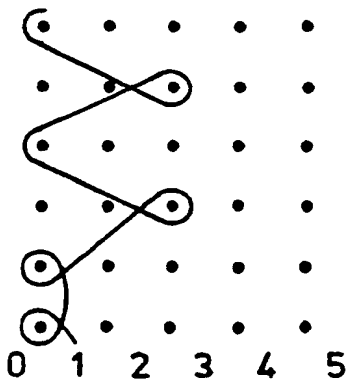


FIG.44



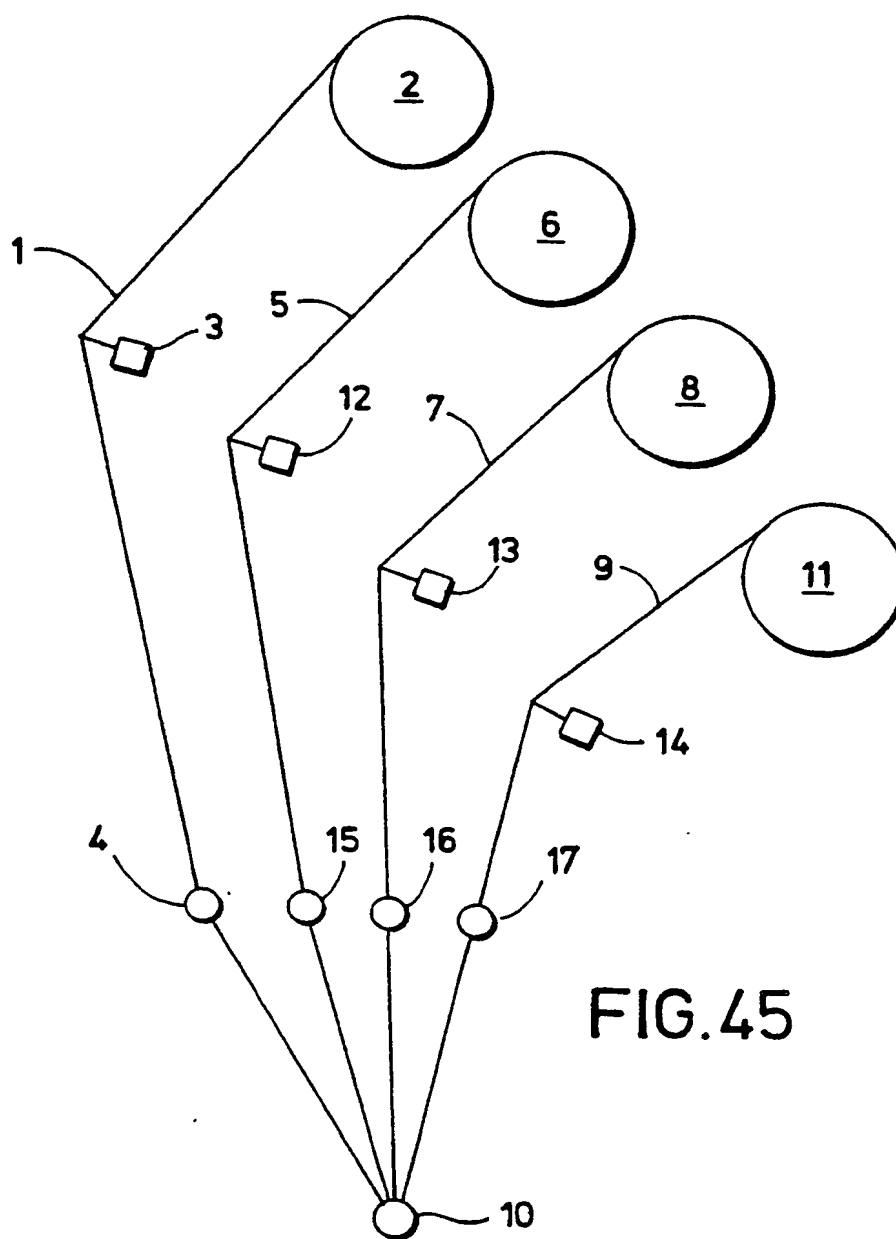


FIG. 47


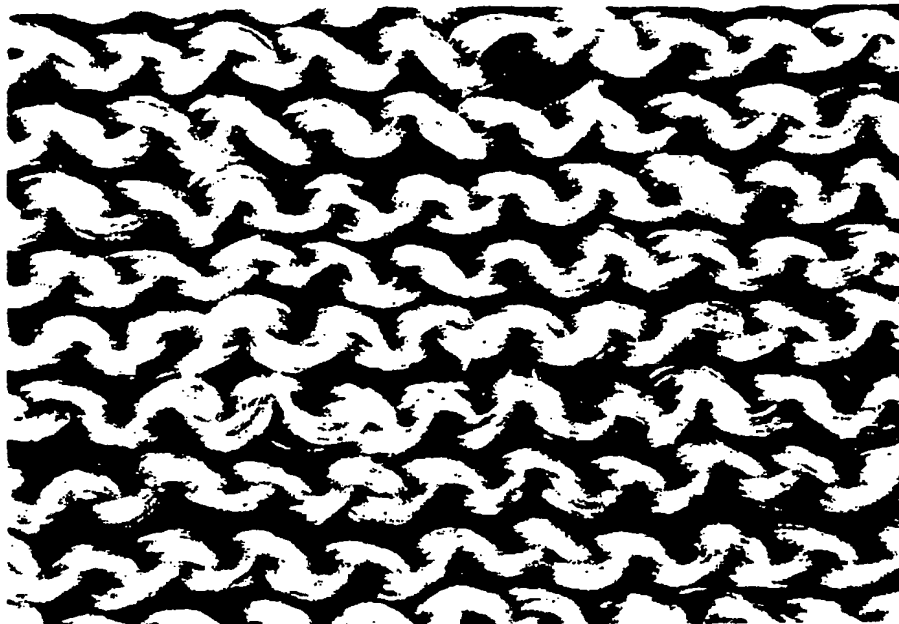


FIG. 46



THIS PAGE BLANK (USPTO)

(19)

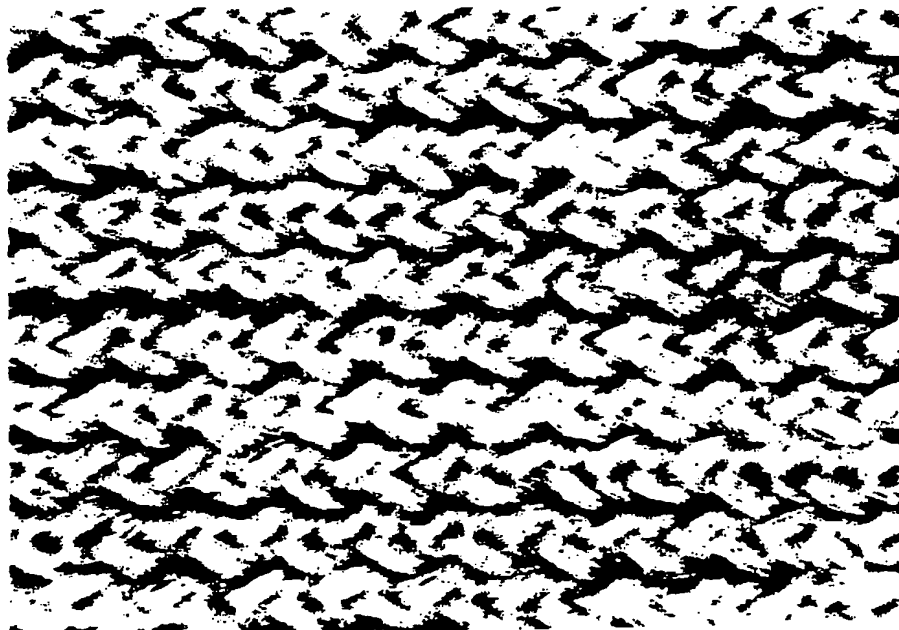

Europäisches Patentamt
European Patent Office
Office européen des brevets




(11) Publication number:

0 414 497 A3

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **90309158.5**(51) Int. Cl.⁵: **D04B 21/00**(22) Date of filing: **21.08.90**(30) Priority: **22.08.89 US 397178**
30.05.90 US 530352(43) Date of publication of application:
27.02.91 Bulletin 91/09(84) Designated Contracting States:
AT BE CH DE ES FR GB GR IT LI(88) Date of deferred publication of the search report:
20.05.92 Bulletin 92/21(71) Applicant: **E.I. DU PONT DE NEMOURS AND COMPANY**
1007 Market Street
Wilmington Delaware 19898(US)(72) Inventor: **Gajjar, Bahrat Jaybhadra**
3238 Champions Drive
Wilmington, Delaware 19808(US)(74) Representative: **Jones, Alan John et al**
CARPMAELS & RANSFORD 43 Bloomsbury Square
London, WC1A 2RA(GB)(54) **Method of warp knitting.**

(57) Warp knit fabric having a two and three-course repeat pattern of alternating first and second, or first, second and third and first, second, third and fourth bar yarns. The fabric is prepared by interlocking the first and second or first, second and third bar yarns using a combination of knit and laid-in stitches in the same for two course, and same and opposite fashion for three and four course repeat.

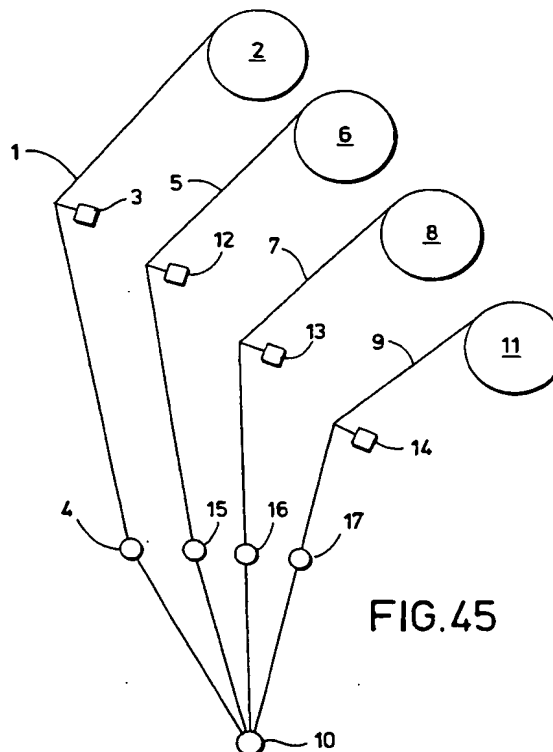**FIG.45**



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

DOCUMENTS CONSIDERED TO BE RELEVANT			EP 90309158.5
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	<u>US - A - 4 638 648</u> (GAJJAR) * Fig. 1A-D; claim 1 *	1	D 04 B 21/00
A	--	3	
A	<u>GB - A - 2 105 379</u> (DU PONT) * Fig. 1; abstract *	1	
A	--		
A	<u>EP - A - 0 322 190</u> (DU PONT) * Fig. 1,30; page 2, lines 42-54 *	1	
A	--		
A	<u>US - A - 4 026 130</u> (GAJJAR) * Fig. 1A,2; abstract *	1	

			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			D 04 B 21/00 D 04 B 23/00
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 16-03-1992	Examiner HUBER
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P0401)